DTK-TSS6

Total Surge Solution for Fire Alarm Systems



DITEK's DTK-TSS6 provides a total surge protection solution for addressable and conventional alarm systems. It protects 120Vac system power and up to eight (8) pairs of SLC, IDC/PIV, NAC or dialer circuits. The TSS6 is equipped with a DTK-120HW for 120Vac surge protection and a DTK-4MB mounting base. Adding DTK-2MHLP modules for data/signal and dialer circuit protection provides a complete solution for your fire alarm system. The DTK-TSS6 includes an NFPA 72 10.6.5.4 compatible lockout kit to prevent accidental disconnect of the fire alarm system.

PRODUCT FEATURES

- 120Vac power surge protection
- 4-position mounting base for 2MHLP modules to protect up to (8) SLC, NAC, IDC, PIV, network or dialer circuit pairs (2MHLP modules must be ordered separately)
- NEMA 4X polycarbonate enclosure for outdoor installations

APPLICATIONS

- Fire Alarm Control Panels

PRODUCT CONFIGURATION EXAMPLE

- DTK-TSS6
- DTK-2MHLP24F x 1 – protects (2) SLC circuits
- DTK-2MHLP24B x 2 – protects (4) NAC circuits
- DTK-2MHLP130B x 1 – protects (2) telco lines


TECHNICAL SPECIFICATIONS	
Service Voltage:	120Vac Single Φ
MCOV:	150V
Max. Continuous Current:	20 amps
Surge Current Rating:	50,000A
Nominal Discharge Current Rating (I_n):	10kA
Short Circuit Current Rating (SCCR):	10,000A
Voltage Protection Rating (VPR):	700V Line-Ground 1500V Neutral-Ground 700V Line-Neutral
Status Indication:	LED

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
Diteksurgeprotection.com • SPS-100005-006 Rev 4 05/26

Every precaution has been taken to ensure that this is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.

DTK-TSS6

Total Surge Solution for Fire Alarm Systems

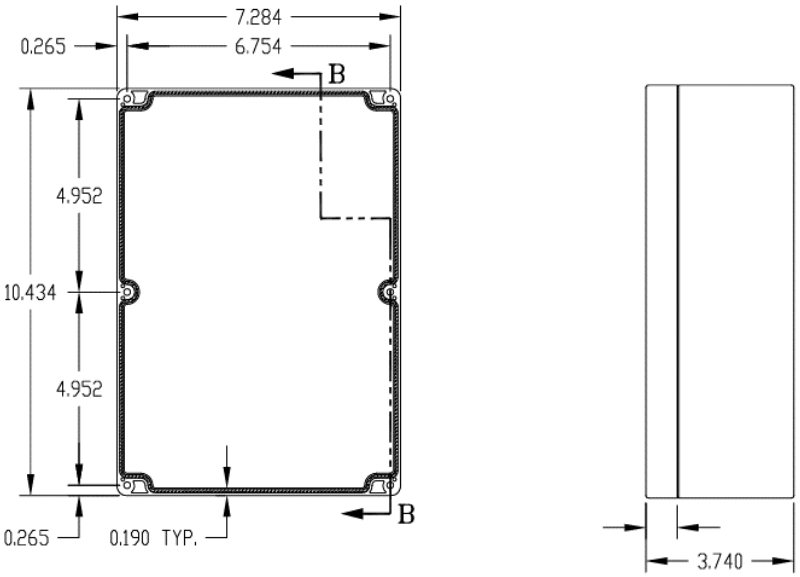

MECHANICAL SPECIFICATIONS	
Connection Method:	DTK-120HW Terminal block 12 AWG DTK-4MB Terminal blocks 30-12 AWG
Housing:	NEMA 4X polycarbonate
Operating Temperature:	-40°F – 175°F (-40°C – 80°C)
Maximum Humidity:	95% non-condensing
Dimensions:	10.43 in. L x 7.28 in. W x 3.74 in. H (265 mm x 185 mm x 95 mm)
Weight:	2.9 lbs. (1.32kg)

SAFETY STANDARDS AND CERTIFICATIONS	
Certifications:	**DTK-120HW** UL 1449 5th Edition Type 2 SPD CSA C22.2 No. 269.1-17, 2017-02 Type 1 SPD **DTK-2MHLP Series Modules** UL 497B
Standards Compliance:	RoHS
Warranty:	10 Year Limited Warranty

DITEK Surge Protection, Largo, FL 33771 • Sales: 800-753-2345
Diteksurgeprotection.com • SPS-100005-006 Rev 4 05/26

Every precaution has been taken to ensure that this is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.